This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images, please do not report the images to the Image Problem Mailbox.

OIPE
APR 0 9 2003
PATENT & TRADEMARK OFFICE
JC09

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: William Plenderleith	
U. S. Patent Application Serial Number: 09/989,351	Examiner: Unknown.
U.S. Filing Date: November 20, 2001	Group Art Unit: 3618
PCT No.: PCT/GB00/01926	Confirmation No. 1758
International Filing Date: May 22, 2000	Customer No. 27128
Priority Data: May 22, 1999 (U.K. Patent No. 9911843.2)	
For: SPORTS VEHICLE	
Attorney Docket: 717901.16	

RECEIVED
APR 1 4 2003
GROUP 3600

PREVIOUSLY MADE PRIORITY CLAIM UNDER 35 U.S.C. § 119 BY THE FILING OF CERTIFIED COPIES OF PRIORITY PATENT APPLICATIONS

Applicant is hereby submitting certified copies of PCT Application No. PCT/GB00/01926 that was filed 22 May 2000 and Great Britain Patent Application No. 9911843.2 that was filed 22 May 1999. This perfects the previously made claim to priority.

If you have any questions or comments, please do not hesitate to contact the undersigned attorney listed below.

Respectfully submitted,

Date: Apr. 19, 2003

Kevin M. Kercher
Reg. No. 33,408
Blackwell Sanders Peper Martin LLP
720 Olive Street, 24th Floor
St. Louis, Missouri 63101
(314) 345-6000
ATTORNEY(S) FOR APPLICANT

WORLD INTELLECTUAL PROPERTY ORGANIZATION

世界知识产权组织

ORGANIZACION MUNDIAL DE LA PROPIEDAD INTELECTUAL

ORGANISATION MONDIALE DE LA PROPRIÉTÉ INTELLECTUELLE

المنظمة العالمية للملكية الفكرية

ВСЕМИРНАЯ ОРГАНИЗАЦИЯ ИНТЕЛЛЕКТУАЛЬНОЙ СОБСТВЕННОСТИ

OIPE JC99 APR 09 2003 PATENT & TRADEMARK OFFICE

CERTIFICATION

It is hereby certified that the attached copy is a true copy of the record copy of International Application No. PCT/GB00/01926, filed with the United Kingdom Patent Office as receiving Office on 22 May 2000 (22.05.00) and received by the International Bureau on 20 June 2000 (20.06.00), including any pages containing corrections and/or rectifications transmitted by the competent Authority to, and received by, the International Bureau before the completion of the technical preparations for international publication.

By: The International Bureau

RECEIVED
APR 14 2003
GROUP 3600

Linda Schwartz
Head
PCT Examination Section II

Date: 21 January 2003 (21.01.03)

34, chemin des Colombettes, 1211 GENÈVE 20 (SUISSE); ✆ (022) 338 9111; Fac-similé (41-22) 733 5428; Télex CH - 412 912
Internet: http://www.wipo.int e-mail: wipo.mail@wipo.int Banque: Crédit Suisse, Genève, compte OMPI N°48 7080-81
www.ompi.int Chèques postaux: OMPI N° 12-5000-8, Genève

Record Copy

PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office use only

PCT/GB 00 / 01926
International Application No.

22 MAY 2000 22.5.2000
International Filing Date

United Kingdom Patent Office
PCT International Application
Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference
(if desired) (12 characters maximum) P23589A/HGR/

Box No. I TITLE OF INVENTION

"Sports Vehicle"

Box No. II APPLICANT

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

PLENDERLEITH William
4 Addison Gardens
Douglas
Lanark
ML11 0PW
United Kingdom

[X] This person is also inventor.

Telephone No.

Facsimile No.

Teleprinter No.

State *(that is, country)* of nationality: United Kingdom

State *(that is, country)* of residence: United Kingdom

This person is applicant for the purposes of: [X] all designated States [ ] all designated States except the United States of America [ ] the United States of America only [ ] the States indicated in the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)*

This person is:

[ ] applicant only

[ ] applicant and inventor

[ ] inventor only *(If this check-box is marked, do not fill in below.)*

State *(that is, country)* of nationality:

State *(that is, country)* of residence:

This person is applicant for the purposes of: [ ] all designated States [ ] all designated States except the United States of America [ ] the United States of America only [ ] the States indicated in the Supplemental Box

[ ] Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as: [X] agent [ ] common representative

Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)*

Murgitroyd & Company
373 Scotland Street
GLASGOW
G5 8QA
United Kingdom

Telephone No.
0141 307 8400

Facsimile No.
0141 307 8401

Teleprinter No.

[ ] **Address for correspondence:** Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

Box No V DESIGNATIONS OF STATES

The following designations are hereby made under Rule 4.9(a)(*mark the applicable check-boxes: at least one must be marked*):

Regional Patent

☒ AP **ARIPO Patent**: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SL Sierra Leone, SZ Swaziland, TZ United Republic of Tanzania, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT

☒ EA **Eurasian Patent**: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT

☒ EP **European Patent**: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden and any other State which is a Contracting State of the European Patent Convention and of the PCT

☒ OA **OAPI Patent**: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GW Guinea Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (*if other kind of protection or treatment desired, specify on dotted line*).....

National Patent(*if other kind of protection or treatment desired, specify on dotted line*):

☒	AE	United Arab Emirates	☒	LC	Saint Lucia
☒	AL	Albania	☒	LK	Sri Lanka
☒	DZ	Algeria	☒	LR	Liberia
☒	AG	Antigua and Barbuda	☒	LS	Lesotho
☒	AM	Armenia	☒	LT	Lithuania
☒	AT	Austria	☒	LU	Luxembourg
☒	AU	Australia	☒	LV	Latvia
☒	AZ	Azerbaijan	☒	MA	Morocco
☒	BA	Bosnia and Herzegovina	☒	MD	Republic of Moldova
☒	BB	Barbados	☒	MG	Madagascar
☒	BG	Bulgaria	☒	MK	The former Yugoslav Republic of Macedonia
☒	BR	Brazil	☒	MN	Mongolia
☒	BY	Belarus	☒	MW	Malawi
☒	CA	Canada	☒	MX	Mexico
☒	CH and LI	Switzerland and Liechtenstein	☒	NO	Norway
☒	CN	China	☒	NZ	New Zealand
☒	CR	Costa Rica	☒	PL	Poland
☒	CU	Cuba	☒	PT	Portugal
☒	CZ	Czech Republic	☒	RO	Romania
☒	DE	Germany	☒	RU	Russian Federation
☒	DK	Denmark	☒	SD	Sudan
☒	DM	Dominica	☒	SE	Sweden
☒	EE	Estonia	☒	SG	Singapore
☒	ES	Spain	☒	SI	Slovenia
☒	FI	Finland	☒	SK	Slovakia
☒	GB	United Kingdom	☒	SL	Sierra Leone
☒	GD	Grenada	☒	TJ	Tajikistan
☒	GE	Georgia	☒	TM	Turkmenistan
☒	GH	Ghana	☒	TR	Turkey
☒	GM	Gambia	☒	TT	Trinidad and Tobago
☒	HR	Croatia	☒	TZ	United Republic of Tanzania
☒	HU	Hungary	☒	UA	Ukraine
☒	ID	Indonesia	☒	UG	Uganda
☒	IL	Israel	☒	US	United States of America
☒	IN	India	☒	UZ	Uzbekistan
☒	IS	Iceland	☒	VN	Viet Nam
☒	JP	Japan	☒	YU	Yugoslavia
☒	KE	Kenya	☒	ZA	South Africa
☒	KG	Kyrgyzstan	☒	ZW	Zimbabwe
☒	KP	Democratic People's Republic of Korea			
☒	KR	Republic of Korea			
☒	KZ	Kazakhstan			

Check-boxes reserved for designating States (for the purposes of a national patent) which have become party to the PCT after issuance of this sheet:

☒ MZ Mozambique

In addition to the designations made above, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except the designation(s) of _____

The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirm before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. *(Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit).*

Sheet No. 3

Box No. VI PRIORITY CLAIM ☐ Further priority claims are indicated in the Supplemental Box.

Filing date of earlier application (day/month/year)	Number of earlier application	Where earlier application is: national application: country	regional application:* regional Office	international application: receiving Office
item (1) 22.05.99 22 May 1999	9911843.2	United Kingdom		
item (2)				
item (3)				

☒ The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) *(only if the earlier application was filed with the Office which for the purposes of the present international application is the receiving Office)* identified above as item(s): 1

** Where the earlier application is an ARIPO application, it is mandatory to indicate in the Supplemental Box at least one country party to the Paris Convention for the Protection of Industrial Property for which that earlier application was filed (Rule 4.10(b)(ii)). See Supplemental Box.*

Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA) *(if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used)* : ISA /

Request to use results of earlier search; reference to that search *(if an earlier search has been carried out by or requested from the International Searching Authority):*

Date *(day/month/year)* Number Country *(or regional Office)*

Box No. VIII CHECK LIST; LANGUAGE OF FILING

This international application contains the following **number of sheets**:

request	: 3
description (excluding sequence listing part)	: 15
claims	: 4
abstract	: 1
drawings	: 12
sequence listing part of description	: 0
Total number of sheets	: 35

This international application is **accompanied by** the item(s) marked below:

1. ☒ fee calculation sheet
2. ☐ separate signed power of attorney
3. ☐ copy of general power of attorney; reference number, if any:
4. ☐ statement explaining lack of signature
5. ☐ priority document(s) identified in Box No. VI as item(s):
6. ☐ translation of international application into (language):
7. ☐ separate indications concerning deposited microorganism or other biological material
8. ☐ nucleotide and/or amino acid sequence listing in computer readable form
9. ☒ other *(specify)*: Patents Form 23/77

Figure of the drawings which should accompany the abstract: 1

Language of filing of the international application: English

Box No. IX SIGNATURE OF APPLICANT OR AGENT

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).

Murgitroyd & Co.

Murgitroyd & Company
Agents for the Applicant

For receiving Office use only

1. Date of actual receipt of the purported international application: 22 MAY 2000 22.05.2000
2. Drawings: ☑ received: ☐ not received:
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:
4. Date of timely receipt of the required corrections under PCT Article 11(2):
5. International Searching Authority (if two or more are competent): ISA /
6. ☑ Transmittal of search copy delayed until search fee is paid.

For International Bureau use only

Date of receipt of the record copy by the International Bureau: 20 JUNE 2000 (20.06.00)

SPORTS VEHICLE

This invention relates to a sports vehicle that enables a person to travel downhill over terrain whose surface characteristics would render the use of a skateboard or snowboard impracticable, and in particular to a sports vehicle which may be ridden by a person standing on a platform on the vehicle.

Devices such as the skateboard and snowboard are well known. The skateboard enables its user to travel over surfaces such as tarmac and concrete, which are relatively smooth and firm. The snowboard enables its user to travel over snow-covered surfaces, which offer a low coefficient of friction. Neither of these devices is suitable for travelling over grassland or any other terrain that lacks the smoothness and firmness required by the skateboard and the low coefficient of friction required by the snowboard.

The object of this invention is to provide a device that enables its user to indulge in pursuits similar to skateboarding and snowboarding over terrain such as grassland.

According to a first aspect of the present invention, there is provided a vehicle for travelling over grassland and similar terrain, said vehicle comprising a generally horizontal platform having attached to its underside one or more rotatable disks each having a lower surface adapted to contact the ground, each of said one or more rotatable disks arranged to rotate about a generally vertical axis, the underside of each of said one or more rotatable disks being substantially convex in form.

Preferably, said vehicle has two or more rotatable disks arranged along a longitudinal axis of said platform.

Preferably, said platform is resiliently pliable. Preferably, said platform comprises a first area on its upper side towards the front of said platform adapted to receive one foot of the user, and a second area on its upper side towards the rear of said platform adapted to receive the other foot of the user, said platform comprising a central portion between said first and second areas adapted to flex resiliently about a lateral axis in the plane of said platform. Preferably, said first and second areas are provided with boot or shoe retention means. The

platform may further comprise a hinge mechanism extending laterally across said platform to aid pliability. The first area of the platform may be provided with a first rotatably mounted foot support member, while the second area of the platform may be provided with a second rotatably mounted foot support member. Preferably each foot support member is rotatably mounted such that its axis of rotation is substantially coincident with the axis of rotation of a rotatable disk. Preferably said first and second foot support members are each provided with boot or shoe retention means.

Preferably, said central portion comprises a portion of said platform having a reduced cross-sectional area. Preferably, said central portion comprises a waist portion of the platform having a reduced width.

In one embodiment the platform may have a generally concave shape in a longitudinal direction in its unstressed state, such that the central portion of the platform is lower than the ends of the platform. In another embodiment the platform may have a generally convex shape in a longitudinal direction in its unstressed state, such that the central portion of the platform is higher than the ends of the platform.

Preferably, each of said one or more rotatable disks is supported on a spindle attached to the underside of said platform. Preferably, said vehicle further

comprises additional support means adapted to provide additional support for each of said one or more rotatable disks in addition to said spindle. Preferably, said additional support means is either a plurality of idler wheels or rollers. Alternatively, each of said one or more rotatable disks is supported solely by either a plurality of idler wheels, a plurality of rollers, or a plurality of balls.

Preferably, each of said one or more rotatable disks is solid.

Alternatively, each of said one or more rotatable disks is hollow, said upper surface of each of said one or more rotatable disks being substantially concave in form. Preferably, said platform is shaped so as to follow the form of said concave upper surface of each of said one or more hollow rotatable disks.

Preferably, the lower surface of each of said one or more rotatable disks is substantially in the form of part of the surface of a sphere. Alternatively, the lower surface of each of said one or more rotatable disks may be substantially in the form of part of the surface of an ellipsoid, a truncated cone, or a truncated toroid.

Preferably, said vehicle further comprises means for the attachment of a sail, to permit the user to traverse substantially level terrain.

Preferably, the platform and rotatable disks are made of composite plastics materials, and the other parts that support the rotatable disks are made of metal, but the platform may instead be made of natural materials, such as wood, and the rotatable disks may be made of metal.

According to a second aspect of the present invention there is provided a vehicle for travelling over grassland and similar terrain, said vehicle comprising a substantially horizontal platform having attached to its underside three or more rotatable disks arranged longitudinally, at least one of said rotatable disks having a first inclined axis, and at least one rotatable disk having a second inclined axis inclined in the opposite sense to said first inclined axis.

A preferred embodiment of the invention will now be described with reference to the accompanying drawings in which:

Figs. 1a and 1b show a side elevation and plan view respectively of a vehicle according to the invention, with the mounting spindle shown schematically;

Figs. 2a and 2b show an end elevation and plan view respectively of the vehicle of Fig. 1 with the platform parallel to the ground;

Figs. 3a and 3b show an end elevation and plan view respectively of the vehicle of Fig. 1 with the platform tilted to one side;

Figs. 4a and 4b show a side elevation and plan view respectively of the vehicle of Fig. 1 when positioned on a sloping surface;

Figs. 5a and 5b show a side elevation and plan view respectively of another vehicle according to the invention having two rotatable disks with the platform flat, the mounting spindles being shown schematically;

Figs. 6a and 6b show a side elevation and plan view respectively of the vehicle of Fig. 5 with the platform curved upwards towards its ends;

Figs. 7a and 7b show a side elevation and plan view respectively of the vehicle of Fig. 5 with the platform curved downwards towards its ends;

Fig. 8a shows a longitudinal section through a vehicle according to the invention showing the rotatable disk mounting arrangement with a central spindle;

Fig. 8b is an enlarged view of part of the longitudinal section of Fig. 8a;

Fig. 9 shows a transverse section through a solid rotatable disk of the vehicle of Fig. 8a;

Fig. 10 shows a transverse section through a hollow rotatable disk;

Fig. 11 shows a transverse section through a rotatable disk mounting arrangement with no central spindle of another vehicle according to the invention;

Fig. 12 shows a transverse section through another platform according to the invention in which the platform follows the form of the rotatable disks;

Figs. 13a and 13b show a side elevation and an end elevation respectively of a vehicle according to a further embodiment of the invention;

Fig. 14 shows a plan view of a vehicle according to a further embodiment of the invention having rotatable foot supports; and

Fig. 15 shows a plan view of the vehicle of Fig. 15 with the foot supports in a rotated position.

In the embodiments illustrated in Figs. 1 to 4, the vehicle according to the invention comprises a platform 1 capable of supporting the user and having on its underside one or more rotatable disks 2. Each rotatable disk 2 rotates about a spindle 3, which is

attached at one end to the underside of the platform with its axis perpendicular to the underside of the platform. The user stands on the platform, with his feet in approximately the position 4 shown in Fig. 1, and he may adopt a crouching stance to enable him to grip handgrips 5 located at each end of the platform.

When the platform 1 is parallel to the ground, as shown in Fig. 2, the point of contact 20 with the ground 30 of each rotatable disk 2 (as seen in plan view) is coincident with the centre of the rotatable disk 2, and any force applied in the plane of the platform 1 will not result in a turning moment being applied to the rotatable disks 2. However, when the platform 1 is tilted to one side, as shown in Fig. 3, the point of contact 22 of each disk 2 with the ground 30 is not coincident with the centre 24 of the rotatable disk 2, and a force applied to the platform 1 will normally cause a turning moment to be applied to the rotatable disks 2.

As shown in Fig. 4, when the platform 1 is resting on a sloping surface 32 of sufficient gradient, and is tilted in a direction other than the direction of maximum gradient, the turning moment induced in the rotatable disks 2 is sufficient to overcome the friction that exists at the point of contact 22 with the ground 32, and the device travels in a downhill direction.

Fig. 5 shows an embodiment of the vehicle of the invention having two rotatable disks 2 and a pliable platform 1 with handgrips 5 at each end. When the platform 1 is flat, the imaginary lines 40 joining the centre 24 of each rotatable disk 2 to its point of contact 22 with the ground (as seen in plan view) are perpendicular to the longitudinal axis of the platform, and the vehicle travels in the direction of the longitudinal axis, indicated by the arrow 42. However, if the ends 44 of the platform are pulled upwards by the user pulling on the handgrips 5, causing the platform 1 to assume a curvature of the type shown in Fig. 6, that is a concave curvature of the upper face of the platform 1, the imaginary lines 46 joining the centre 24 of each rotatable disk 2 to its point of contact 22a with the ground are no longer perpendicular to the longitudinal axis and the vehicle steers towards the side 45 to which it has been tilted, in the direction of the arrow 48. Conversely, if the ends 44 of the platform 1 are pushed downwards by the user, causing the platform to assume a curvature of the type shown in Fig. 7, that is a convex curvature of the upper face of the platform 1, the device steers towards the opposite side, in the direction of arrow 52. The imaginary lines 50 joining the centre 24 of each rotatable disk 2 to its point of contact 22b with the ground are not perpendicular to the longitudinal axis and the vehicle steers away from the side to which it has been tilted.

Figs. 8a and 8b show a detailed embodiment of a vehicle according to the invention. In this embodiment, handgrips 5a are provided in the form of a longitudinal extension of the platform 1 at each end of the platform beyond the outer edge of the adjacent rotatable disk 2. A metal spindle 3 is attached by bolts 60 or other means to the underside of the platform 1. Rolling element bearings 6 are fitted between the spindle 3 and the rotatable disk 2 to reduce the friction and wear arising from rotation of the rotatable disk on the spindle, and the assembly is made secure by a nut 7 secured to the threaded end 62 of the spindle 3, so that the two bearings 6 are held between the nut 7 and a shoulder 64 provided at the upper end of the spindle 3.

The underside of each of the rotatable disks 2 may take a variety of forms, including a segment of a sphere, a segment of an ellipsoid, a truncated cone, a truncated toroid or a combination of these forms. The choice of form is dictated by the contact area required to prevent the rotatable disk sinking into the ground; the nature of the undulations inherent in the terrain over which the device is to be used; and the requirement that the device should not be unduly difficult to balance.

The rotatable disks 2 may be of solid construction, as shown in Fig. 9, or hollow construction, as shown in Fig. 10. The material may be a mouldable plastic or resin, metal, alloy, composite or any material

which can be formed and has the requisite strength and stiffness. Hollow rotatable disks have an outer shell 70 and may have internal ribs 76 (shown in Fig. 13a) to increase their stiffness. Where hollow construction is used, as shown in Fig. 10, one or more idler wheels 8 may be employed to provide additional support to the rotatable disks 2, as shown in Fig 10. Each idler wheel is rotatably mounted on a bracket (not shown) which is fixed to the underside of the platform 1. The wheel 8 is oriented so that its axis or rotation 72 is parallel to the contact surface 74 on the disk 2. The provision of idler wheels 8 serves to reduce the bending moment which must be withstood by the spindle 3 and its bolted connection to the platform 1. It is to be understood that roller or balls may be used to support the edges of the disks 2 in the same way as the idler wheels 8 described above.

Fig. 11 shows an alternative form of rotational support by means of which a disk 2 may be rotatably mounted on the platform 1. A plurality of balls 9 are mounted circumferentially in a ball support channel formed by an outer flange 80 attached to the disk 2 and an inner flange 82 mounted securely to the underside of the platform 1. It is to be understood that other forms of roller or ball bearing which extend around the circumference of the rotatable disk 2 may be used.

Where hollow rotatable disks 2 are used, the platform 1 may be formed in such a way that it follows the form of the upper surface 90 of the rotatable disks 2, as shown in Fig. 12. The user's feet are placed in the concave section of the platform 1. This configuration enables the user to remain closer to the ground and to stand on a surface that is approximately parallel to the ground, since if the user applies weight at a point 92 to one side of the longitudinal axis of the platform 1, then the vehicle 1 will tilt about the longitudinal axis so that the point 94 on the disk 2 comes into contact with the ground 30 and the adjacent part of the platform at point 92 is substantially parallel to the ground 30. In addition, this concave section could be adapted to provide a flat, horizontal surface for the user's feet when the platform is tilted to the appropriate angle, if the upper surface is profiled to the shape shown by the dotted line 96.

A further embodiment of the invention is shown in Fig. 13 which has three rotatable disks 2 mounted on the underside of the platform 1. The two rotatable disks 2a at the ends of the platform 1 are tilted by a particular tilt angle about the longitudinal axis of the platform 1 in one direction, whilst the central rotatable disk 2b is angled by the same or similar tilt angle in the opposite direction. With this arrangement, the platform 1 remains horizontal, but the vehicle can still be steered by deflection of the platform 1 as with the other embodiments.

Figs. 14 and 15 illustrate an embodiment in which the top of the platform 1 is provided with rotatable foot support members 100 which are connected by a rotatable hinge 102 to a point on the upper surface of the platform 1 corresponding to the centre of rotation of the disk 2. The foot support members 100 in the illustrated embodiment are in the form of rigid plates, which may have rollers, bearings or low-friction coatings (not shown) on their underside so that they can rotate freely with respect to the platform 1. The same spindle 3 used to mount the rotatable disk 2 can also be used to mount the hinge 102. In this way the foot support members 100 can rotate about axes coincident with the axes of the rotatable disks 2. The user places his feet on the foot support members 100 and applies his weight through his heels in the normal manner to tilt the platform to one side. If he then moves his heels closer together and thereby rotates the foot support members 100 to the position 100a in Fig. 15, then the platform will assume a "concave up" position, as shown in Fig. 6, causing the vehicle to steer to one side. If he moves his heels further apart and thereby rotates the foot support members 100 to the position 100b in Fig. 15, then the platform will assume a "concave down" position, as shown in Fig. 7, causing the vehicle to steer to the other side. The foot support members may be of any suitable shape and may be fitted with boot or shoe retention devices, such as a simple toe strap 104 or any device of the

sort known in the art of snowboarding, skiing and roller skating.

The device could also be provided with means to which a sail and mast may be attached, if the user was to traverse substantially level terrain. The attachment of such a sail would therefore enable the user to cross terrain with the minimum of effort being required.

Pliability of the platform 1 may be achieved by constructing it entirely of flexible materials, or by using a combination of rigid materials in the vicinity of the user's feet and flexible materials for the middle portion. A region of reduced cross-sectional area may also be incorporated in the platform to facilitate deflection, or a mechanical hinge (not shown) may be employed, which extends across the width of the platform. The hinge may have some form of damping arrangement, to prevent the platform being too flexible.

The illustrated embodiments show the platform 1 to have a generally flat shape in the unstressed state. However it is to be understood that the platform may, in its unstressed condition, have a concave or convex upper surface, of the form illustrated in Figs 6a or 7a respectively. Having such a shape will give the vehicle a natural tendency to steer to one side or the other in the absence of a specific deflection of the platform by the user. In such circumstances a

user can adopt a zigzag course by standing on one side of the platform 1 while proceeding on a first leg of the zigzag course, then at the turning point rotating the board through 180° about a vertical axis and standing on what is effectively the other side of the platform 1 while proceeding on the second leg of the zigzag course.

These and other modifications and variations are possible without departing from the scope of the invention.

CLAIMS

1. A vehicle for travelling over grassland and similar terrain, said vehicle comprising a generally horizontal platform having attached to its underside one or more rotatable disks each having a lower surface adapted to contact the ground, each of said one or more rotatable disks arranged to rotate about a generally vertical axis, the underside of each of said one or more rotatable disks being substantially convex in form.

2. A vehicle according to Claim 1, wherein said vehicle has two or more rotatable disks arranged along a longitudinal axis of said platform.

3. A vehicle according to Claim 1, wherein said vehicle has two rotatable disks arranged along a longitudinal axis of said platform.

4. A vehicle according to any preceding Claim, wherein said platform is resiliently pliable.

5. A vehicle according to any preceding Claim, wherein said platform comprises a first area on its upper side towards the front of said platform adapted to receive one foot of the user, and a second area on its upper side towards the rear of said platform adapted to receive the other foot of the user, said platform comprising a central portion between said

first and second areas adapted to flex resiliently about a lateral axis in the plane of said platform.

6. A vehicle according to Claim 5, wherein the first area of the platform is provided with a first rotatably mounted foot support member, and the second area of the platform is provided with a second rotatably mounted foot support member.

7. A vehicle according to Claim 6, wherein each foot support member is rotatably mounted such that its axis of rotation is substantially coincident with the axis of rotation of a rotatable disk.

8. A vehicle according to Claim 6 or 7, wherein said first and second foot support members are each provided with boot or shoe retention means.

9. A vehicle according to any preceding Claim, wherein said central portion comprises a portion of said platform having a reduced cross-sectional area.

10. A vehicle according to any preceding Claim, wherein the platform has a generally concave shape in a longitudinal direction in its unstressed state, such that the central portion of the platform is lower than the ends of the platform.

11. A vehicle according to any one of Claims 1 to 9, wherein the platform has a generally convex shape in a longitudinal direction in its unstressed state,

such that the central portion of the platform is higher than the ends of the platform.

12. A vehicle according to any preceding Claim, wherein each of said one or more rotatable disks is supported on a spindle attached to the underside of said platform.

13. A vehicle according to Claim 12, wherein said vehicle further comprises additional support means adapted to provide additional support for each of said one or more rotatable disks in addition to said spindle.

14. A vehicle as claimed in Claim 13, wherein said additional support means is a plurality of idler wheels.

15. A vehicle as claimed in Claim 13, wherein said additional support means is a plurality of rollers.

16. A vehicle as claimed in any of Claims 1 to 12, wherein each of said one or more rotatable disks is supported by a support means selected from the group of support means comprising a plurality of idler wheels, a plurality of rollers, and a plurality of balls.

17. A vehicle according to any preceding Claim, wherein each of said one or more rotatable disks is solid.

18. A vehicle according to any one of Claims 1 to 16, wherein each of said one or more rotatable disks is hollow, said upper surface of each of said one or more rotatable disks being substantially concave in form.

19. A vehicle according to Claim 18, wherein said platform is shaped so as to follow the form of said concave upper surface of each of said one or more hollow rotatable disks.

20. A vehicle according to any preceding Claim, wherein the lower surface of each of said one or more rotatable disks is substantially in the form of part of the surface of a sphere, an ellipsoid, a truncated cone, or a truncated toroid.

21. A vehicle according to Claim 1, wherein the platform has attached to its underside three or more rotatable disks arranged longitudinally, the axis of rotation of at least one of said rotatable disks being inclined in a first rotational sense about the longitudinal axis of the platform, and the axis of rotation of at least one other rotatable disk being inclined in an opposite rotational sense about the longitudinal axis of the platform.

ABSTRACT

A sports vehicle includes a substantially horizontal platform (1) capable of supporting the user and having attached to its underside two or more rotatable disks (2) arranged to rotate about substantially vertical axes (3), the underside of each rotatable disk being substantially convex in form. The platform is resilient and can adopt a convex or concave shape, so as to steer the vehicle. The user places his feet on the platform and steers the vehicle by tilting the platform using his body weight. The vehicle enables its user to travel over grassland and similar terrain in a manner similar to skateboarding and snowboarding.

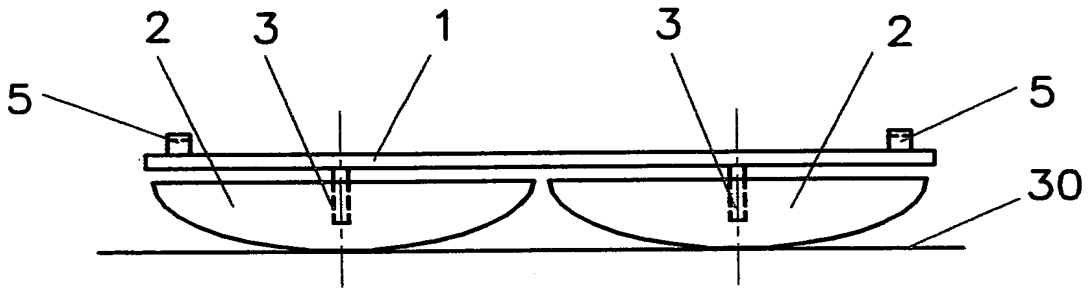

(a)

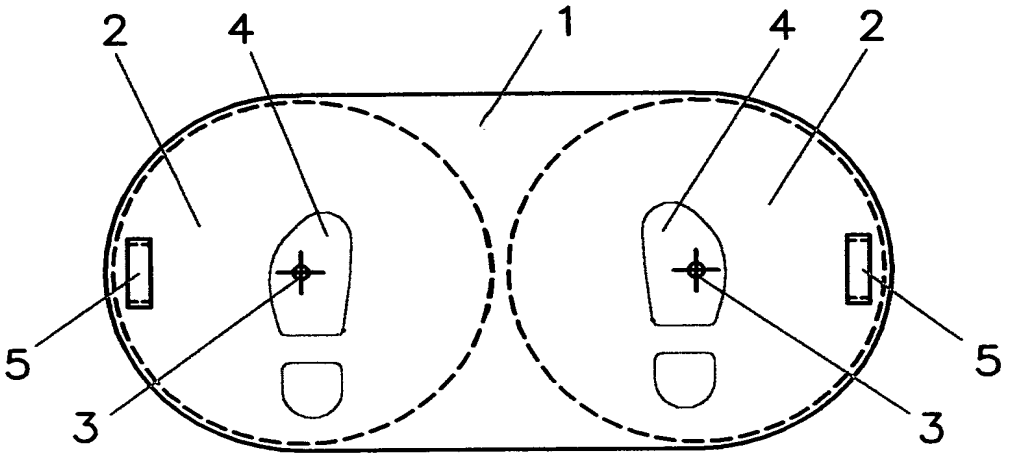

(b)

FIG.1

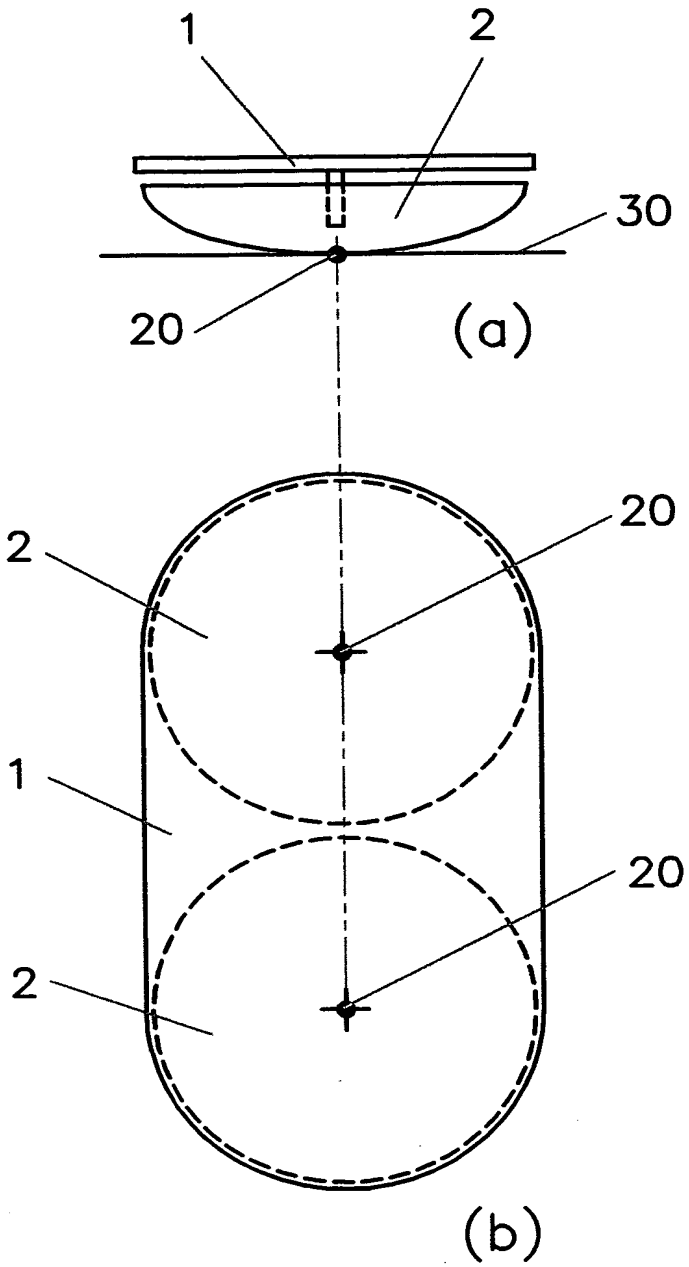

FIG.2

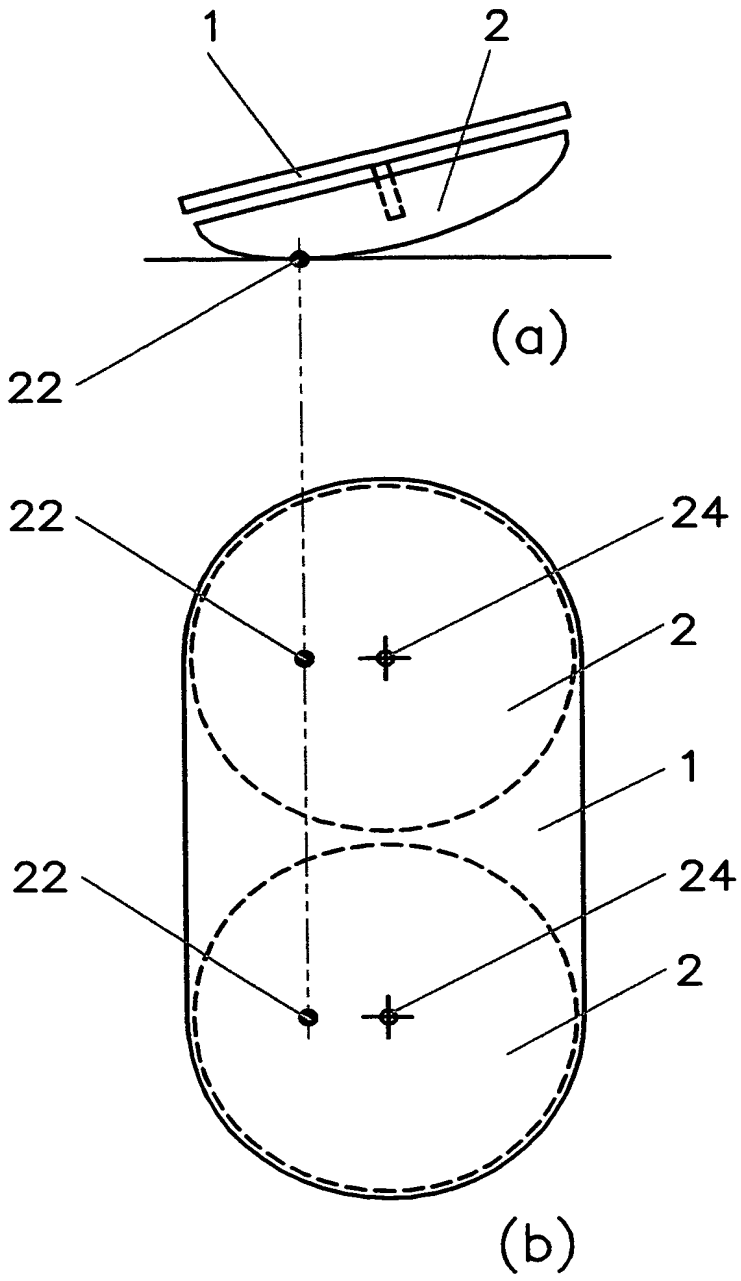

FIG.3

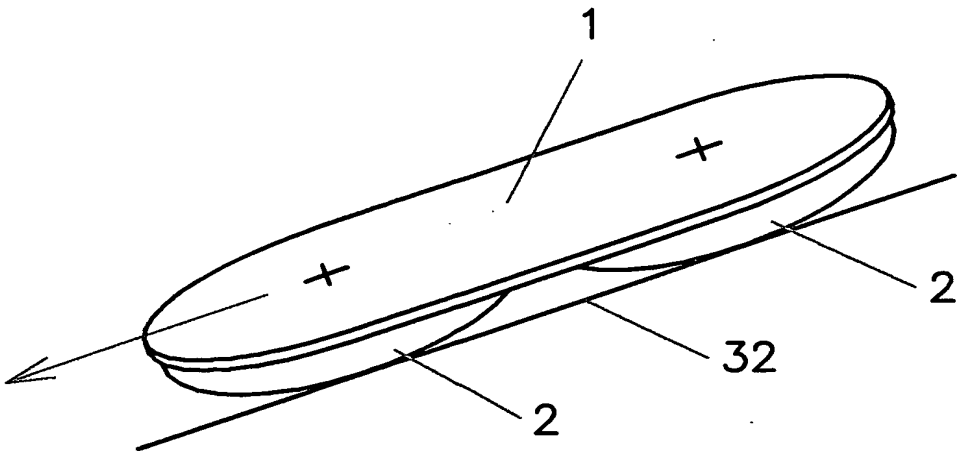

(a)

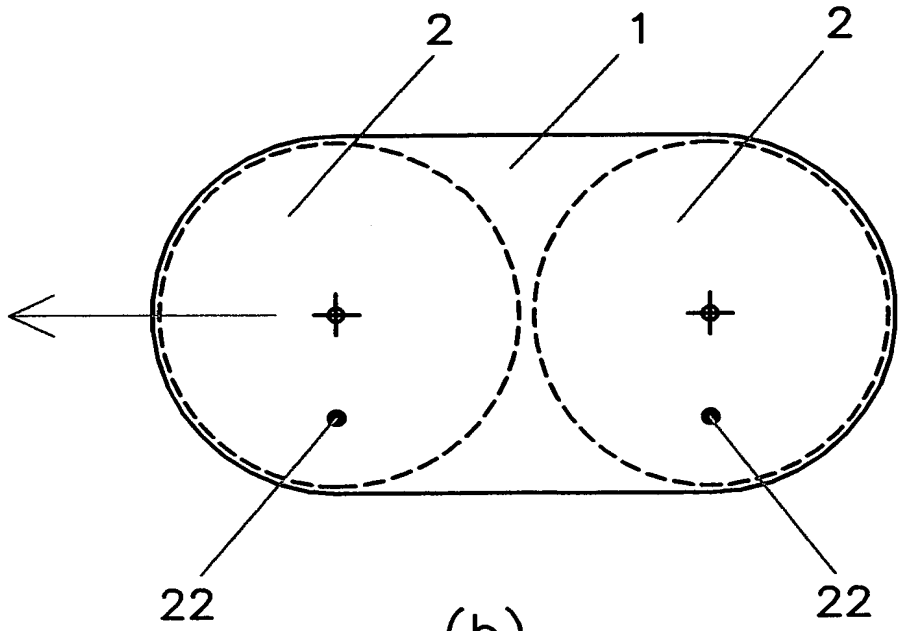

(b)

FIG.4

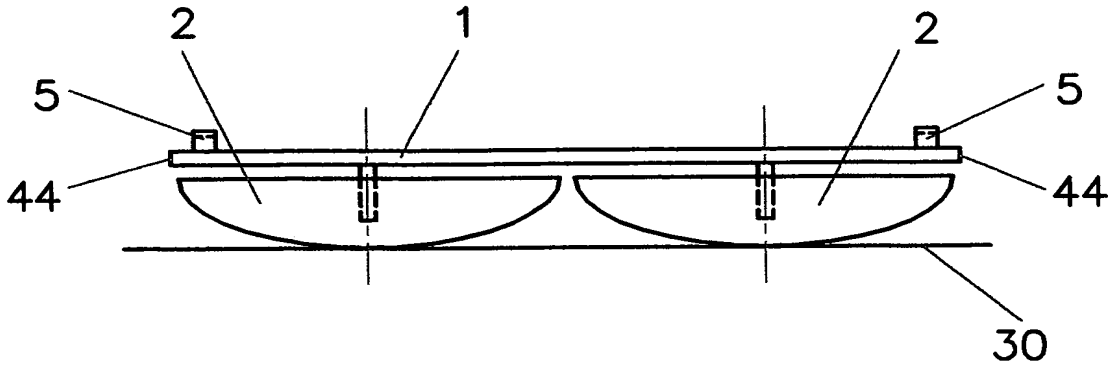

(a)

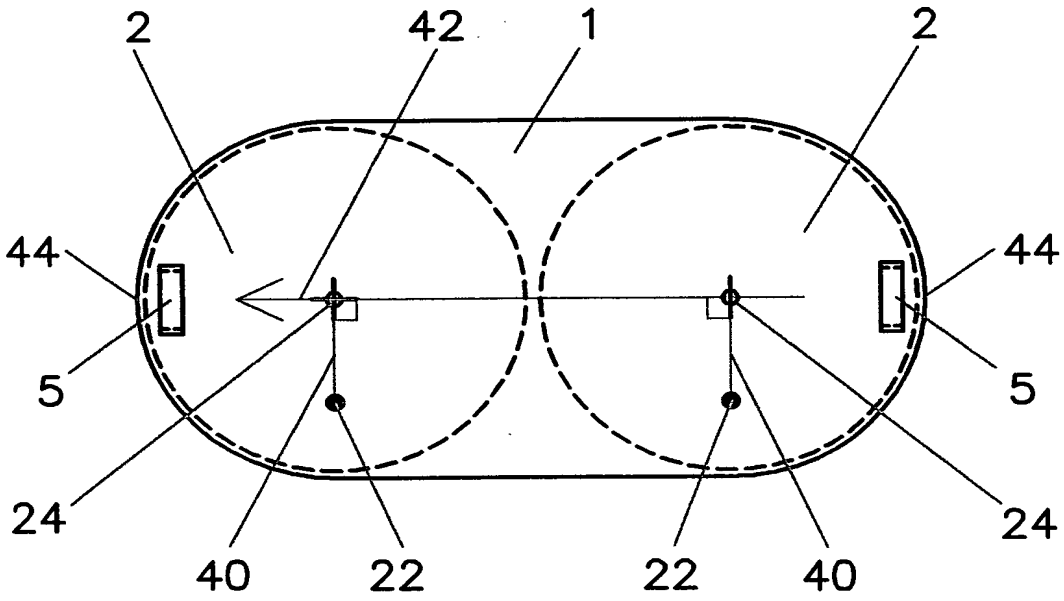

(b)

FIG.5

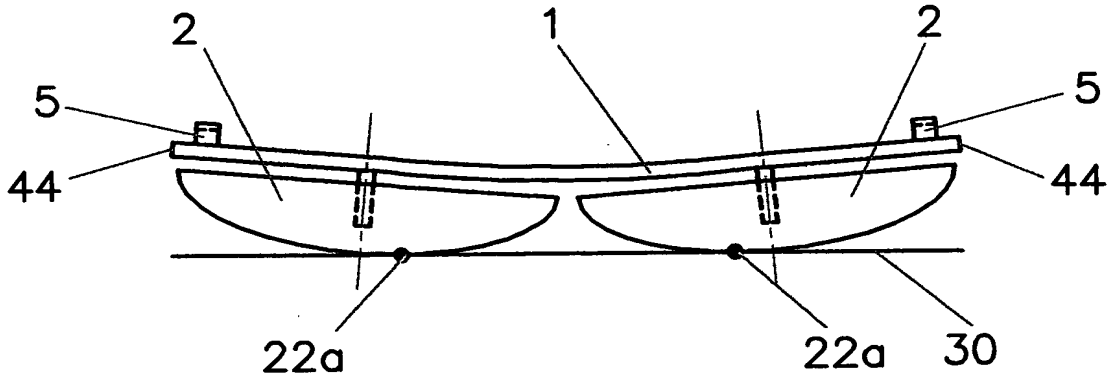

(a)

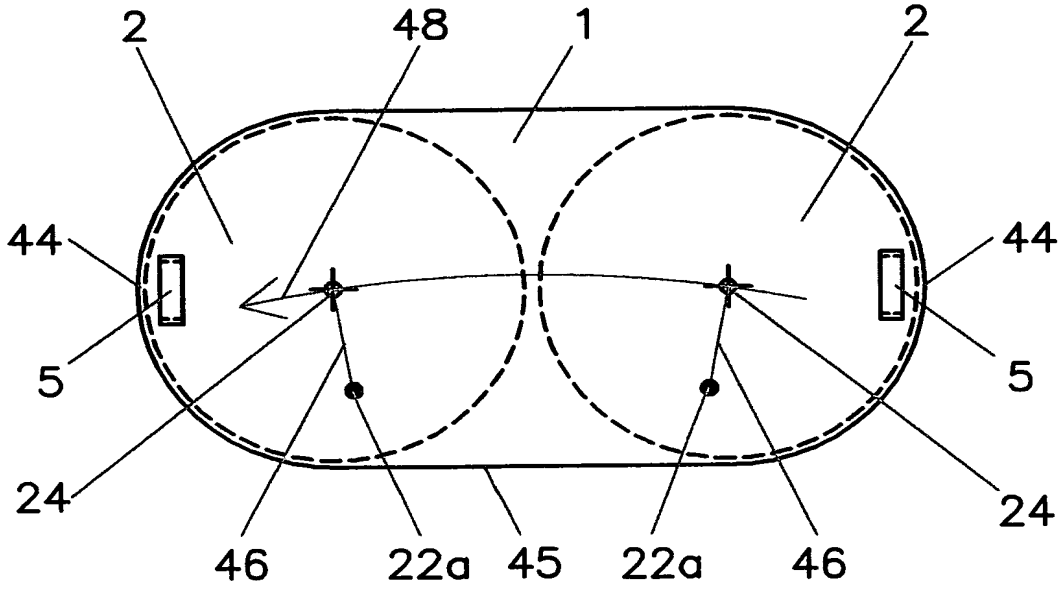

(b)

FIG.6

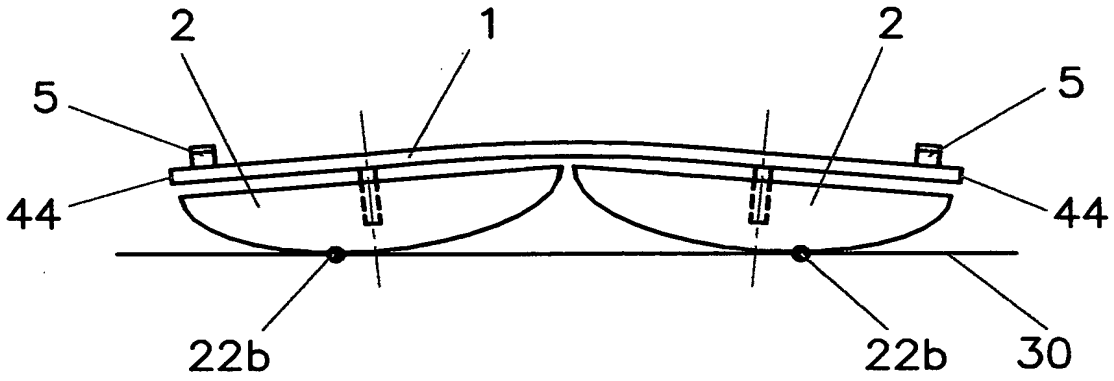

(a)

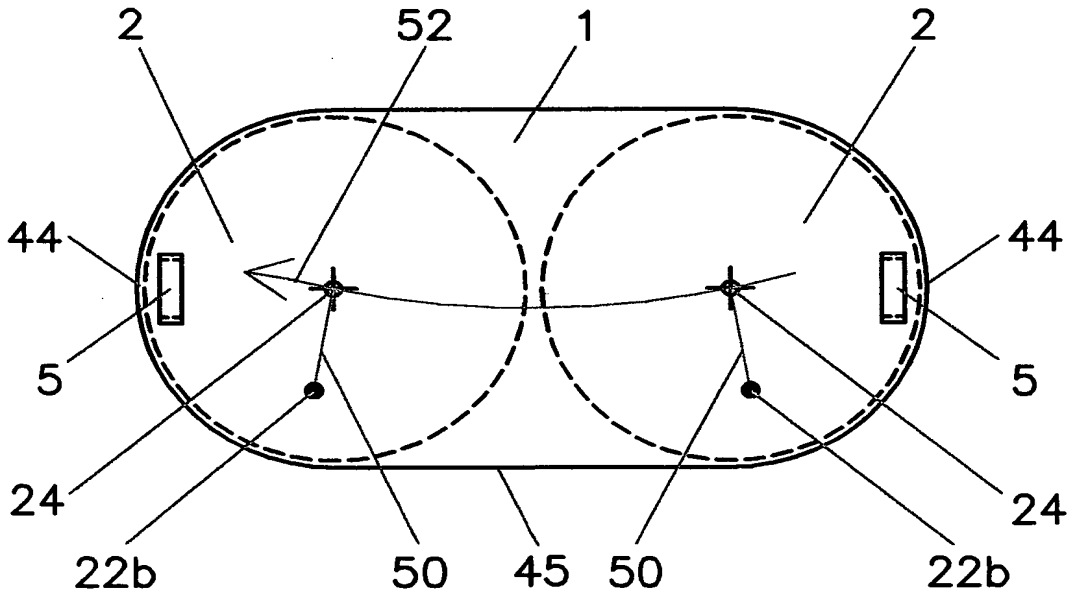

(b)

FIG.7

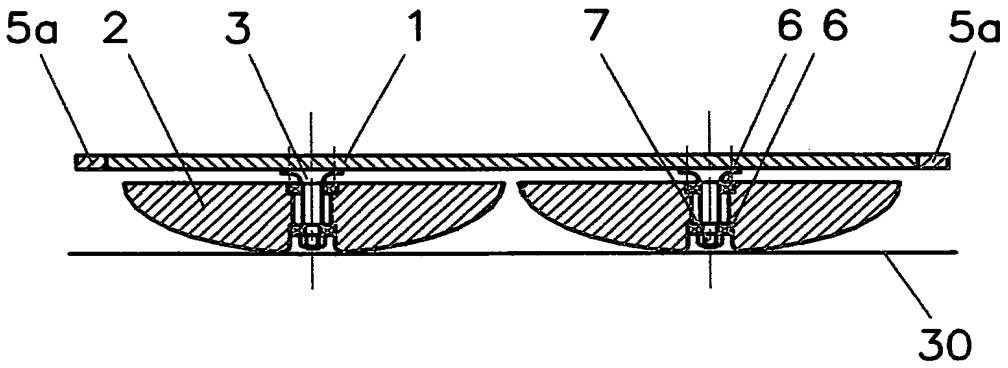

FIG.8a

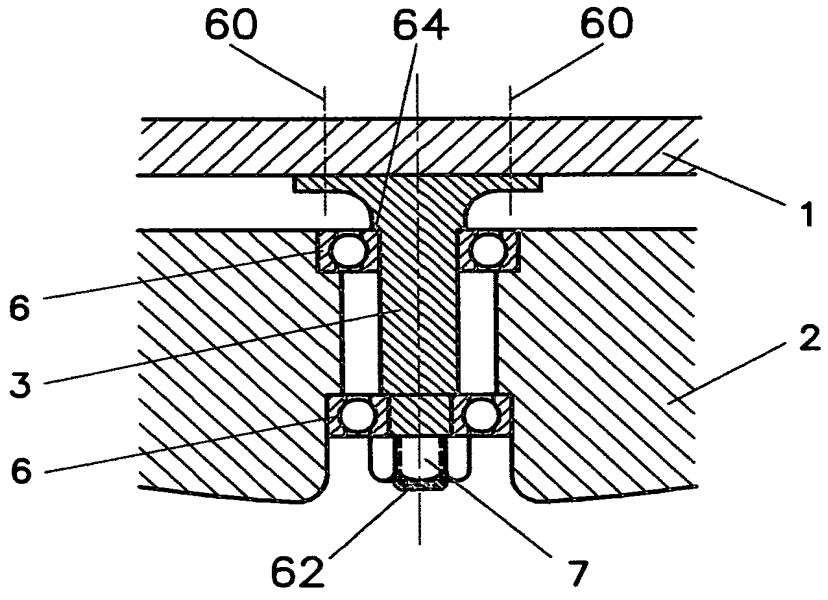

FIG.8b

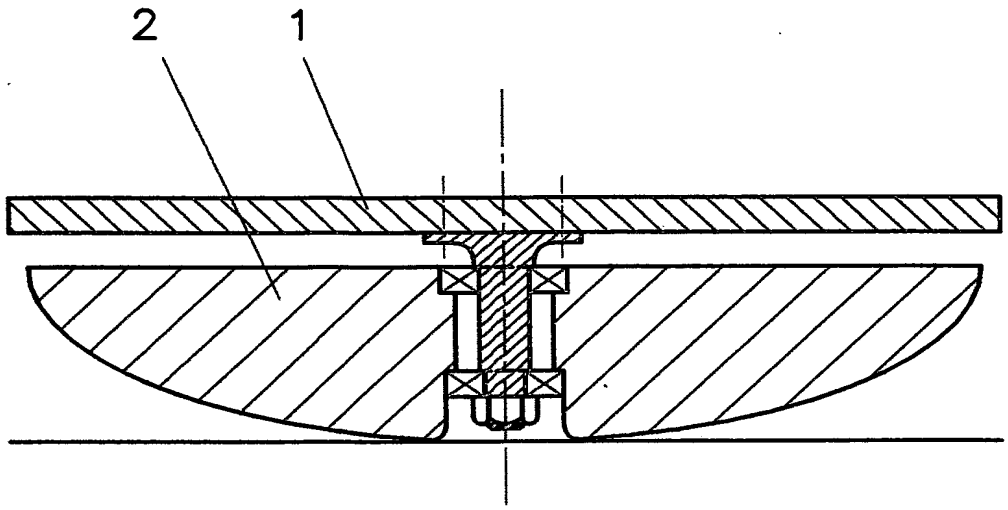

FIG.9

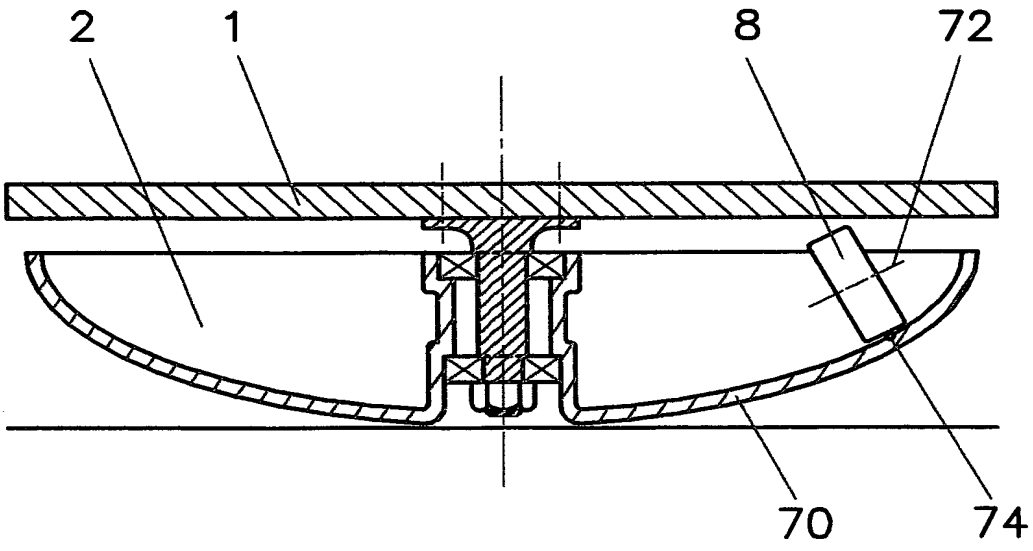

FIG.10

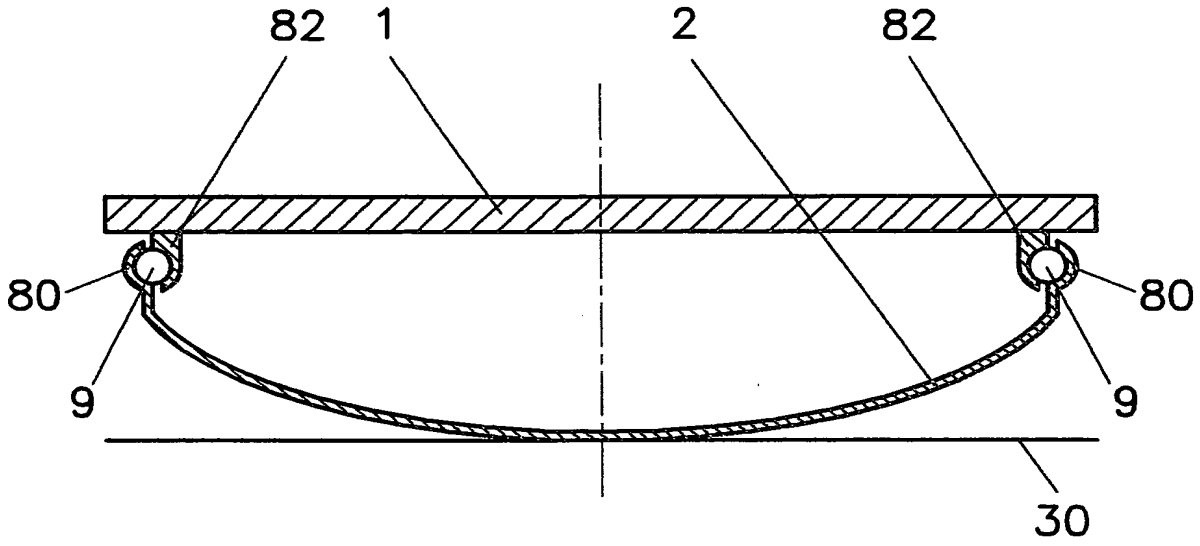

FIG.11

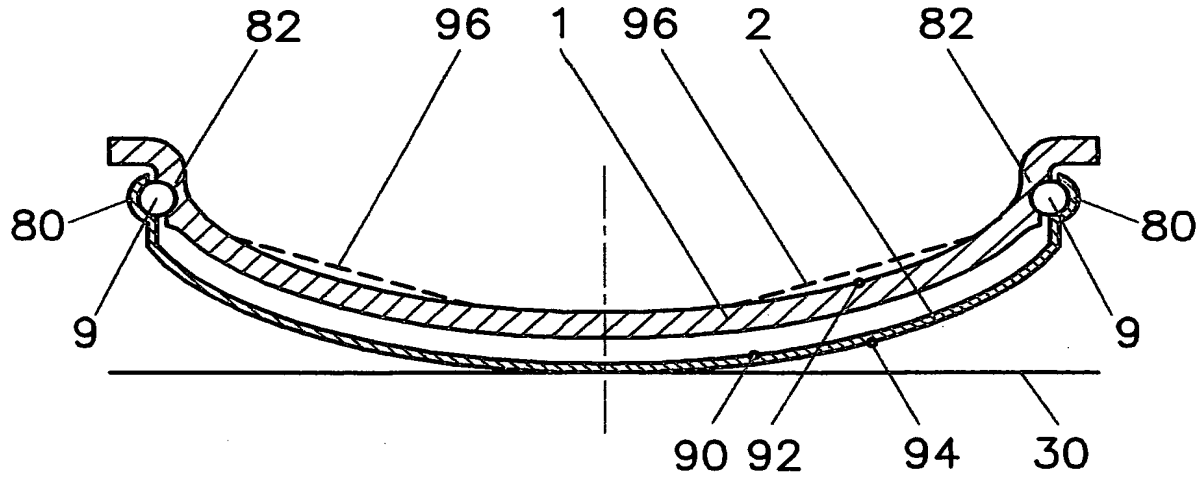

FIG.12

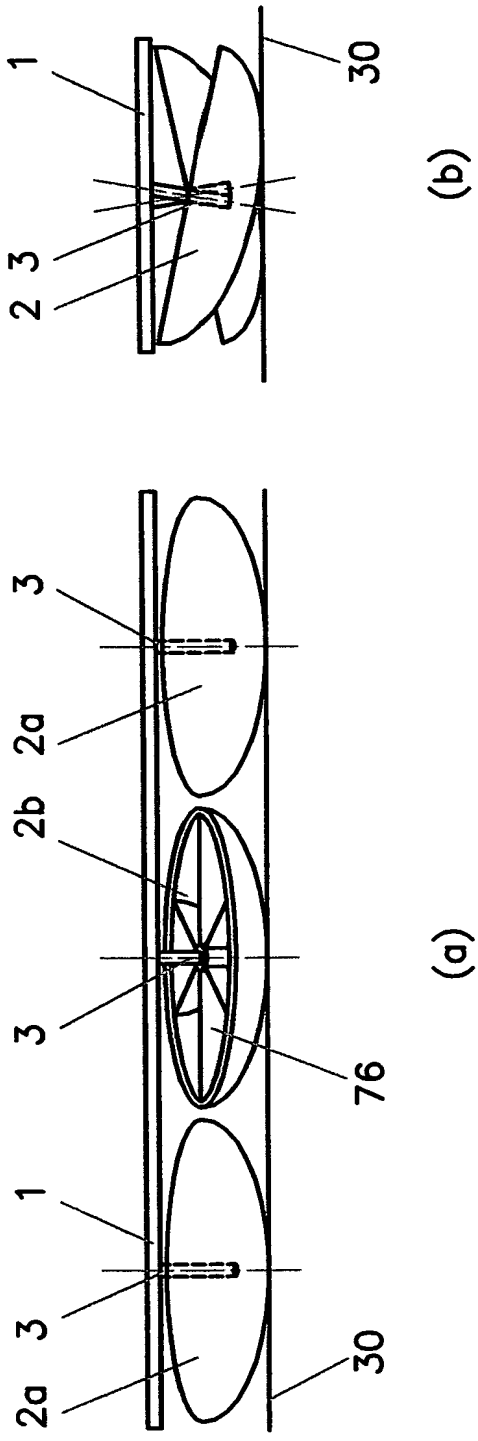

FIG.13

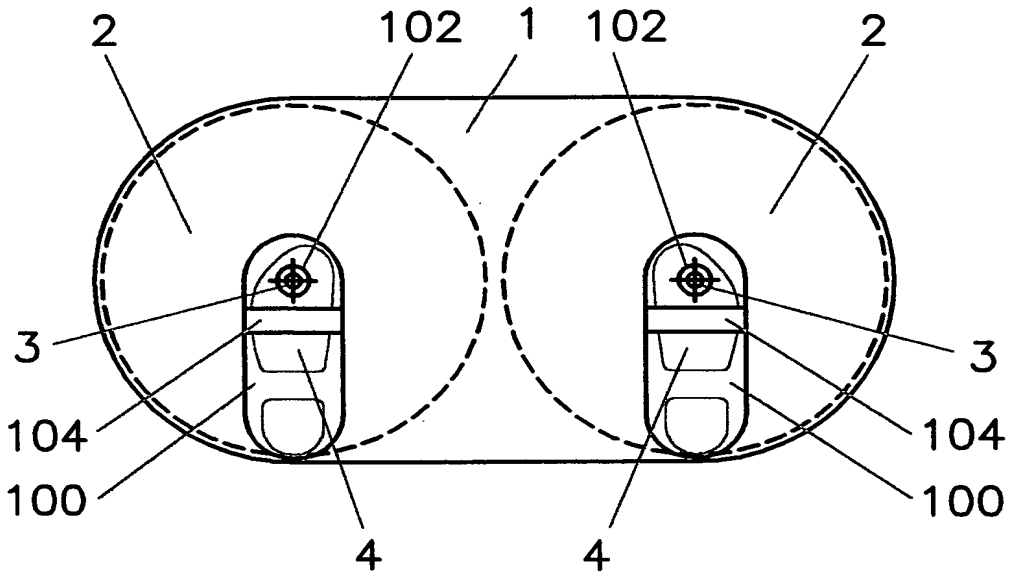
2
102
1
102
2
3
3
104
104
100
100
4
4

FIG.14

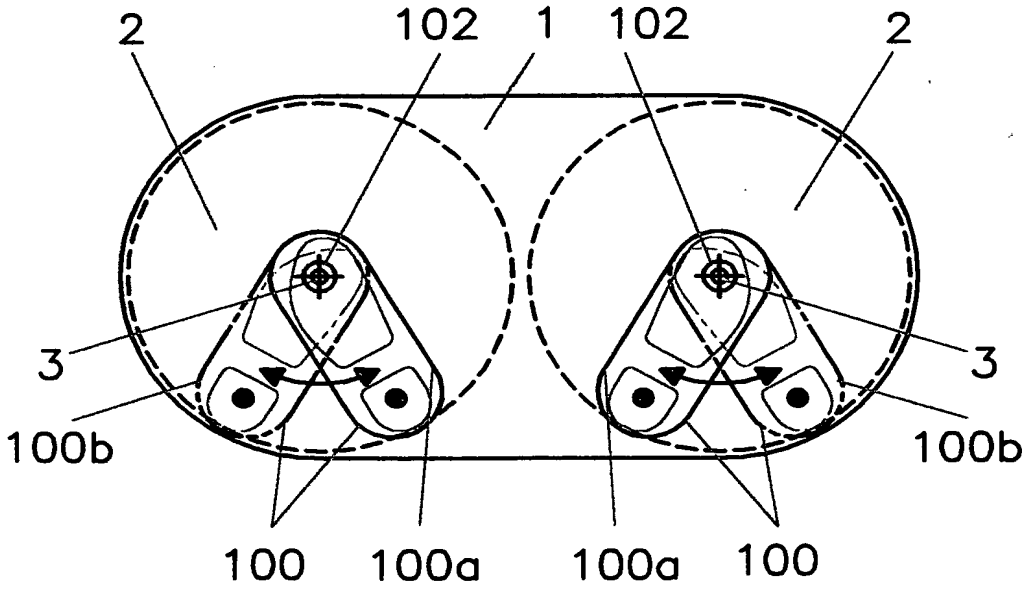
2
102
1
102
2
3
3
100b
100b
100
100a
100a
100

FIG.15

PCT/GB 00/01926

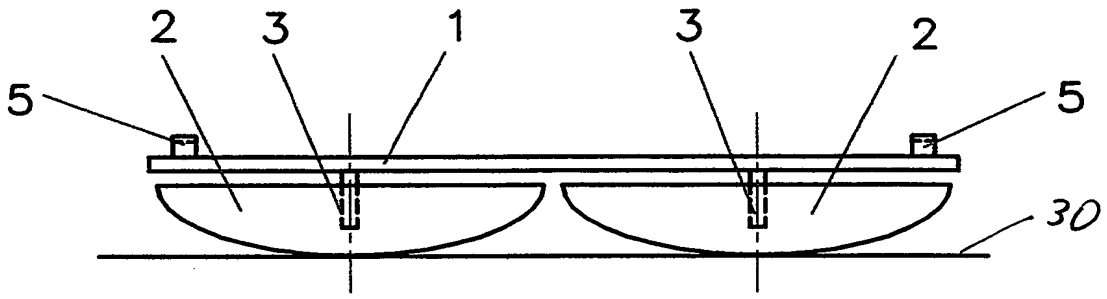

(a)

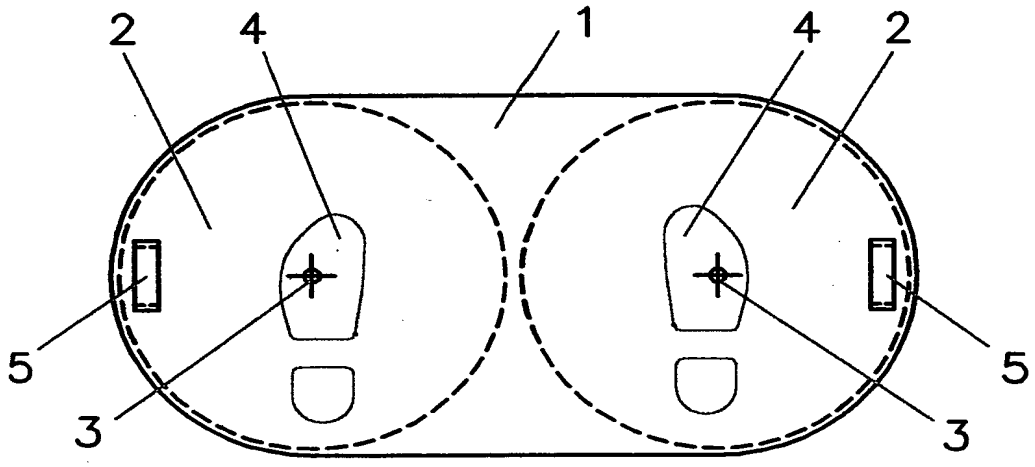

(b)

FIG. 1

REPLACED

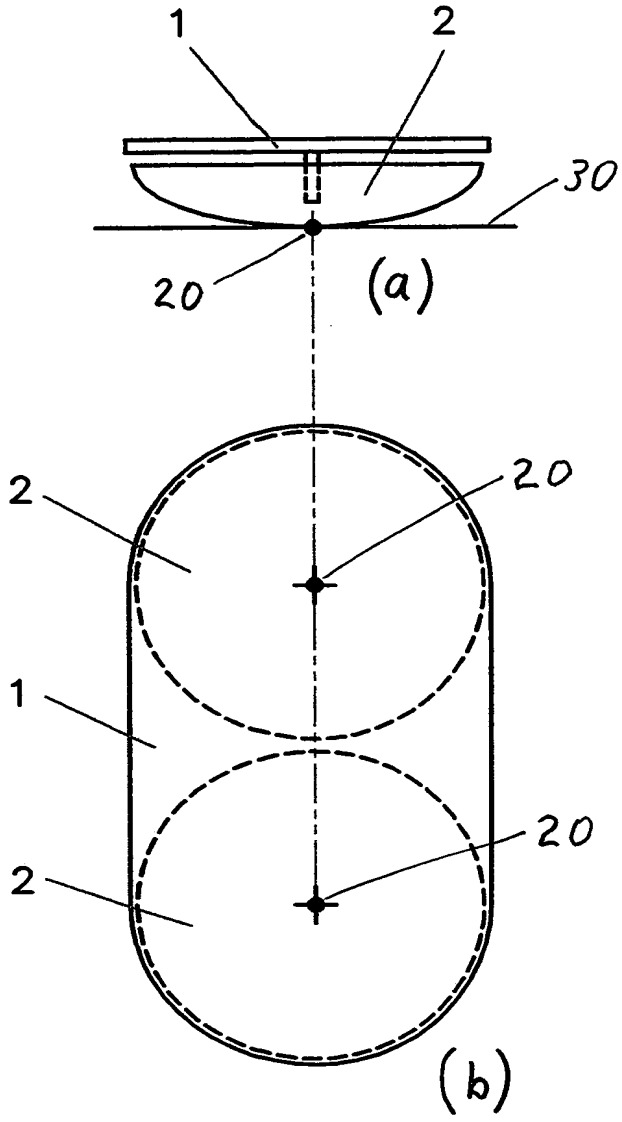

FIG.2

REPLACED

...T/GB 00/01926

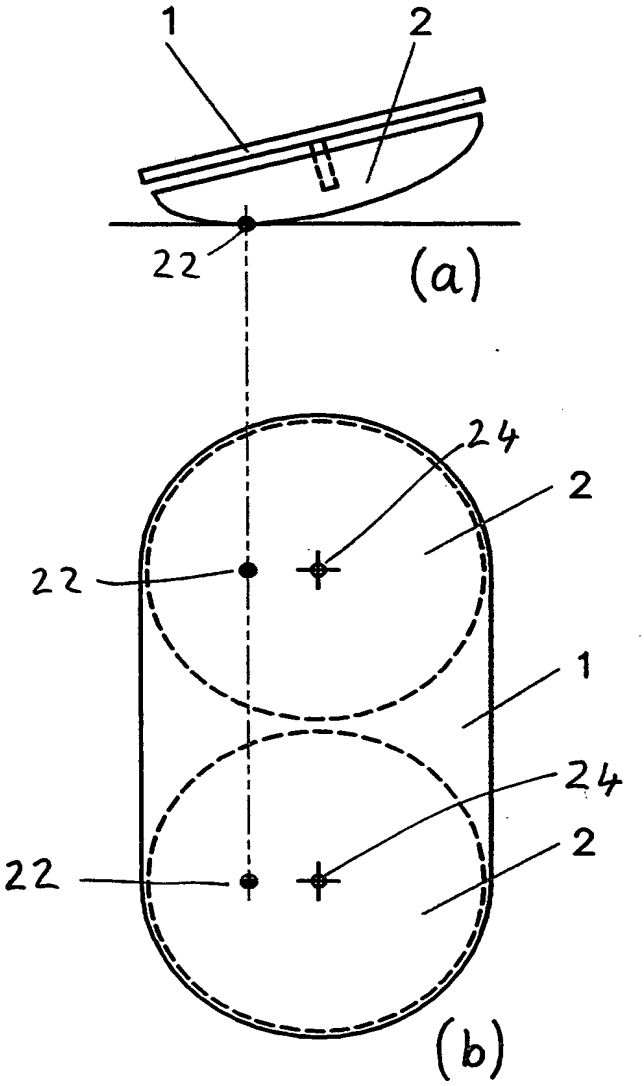

FIG.3

REPLACED

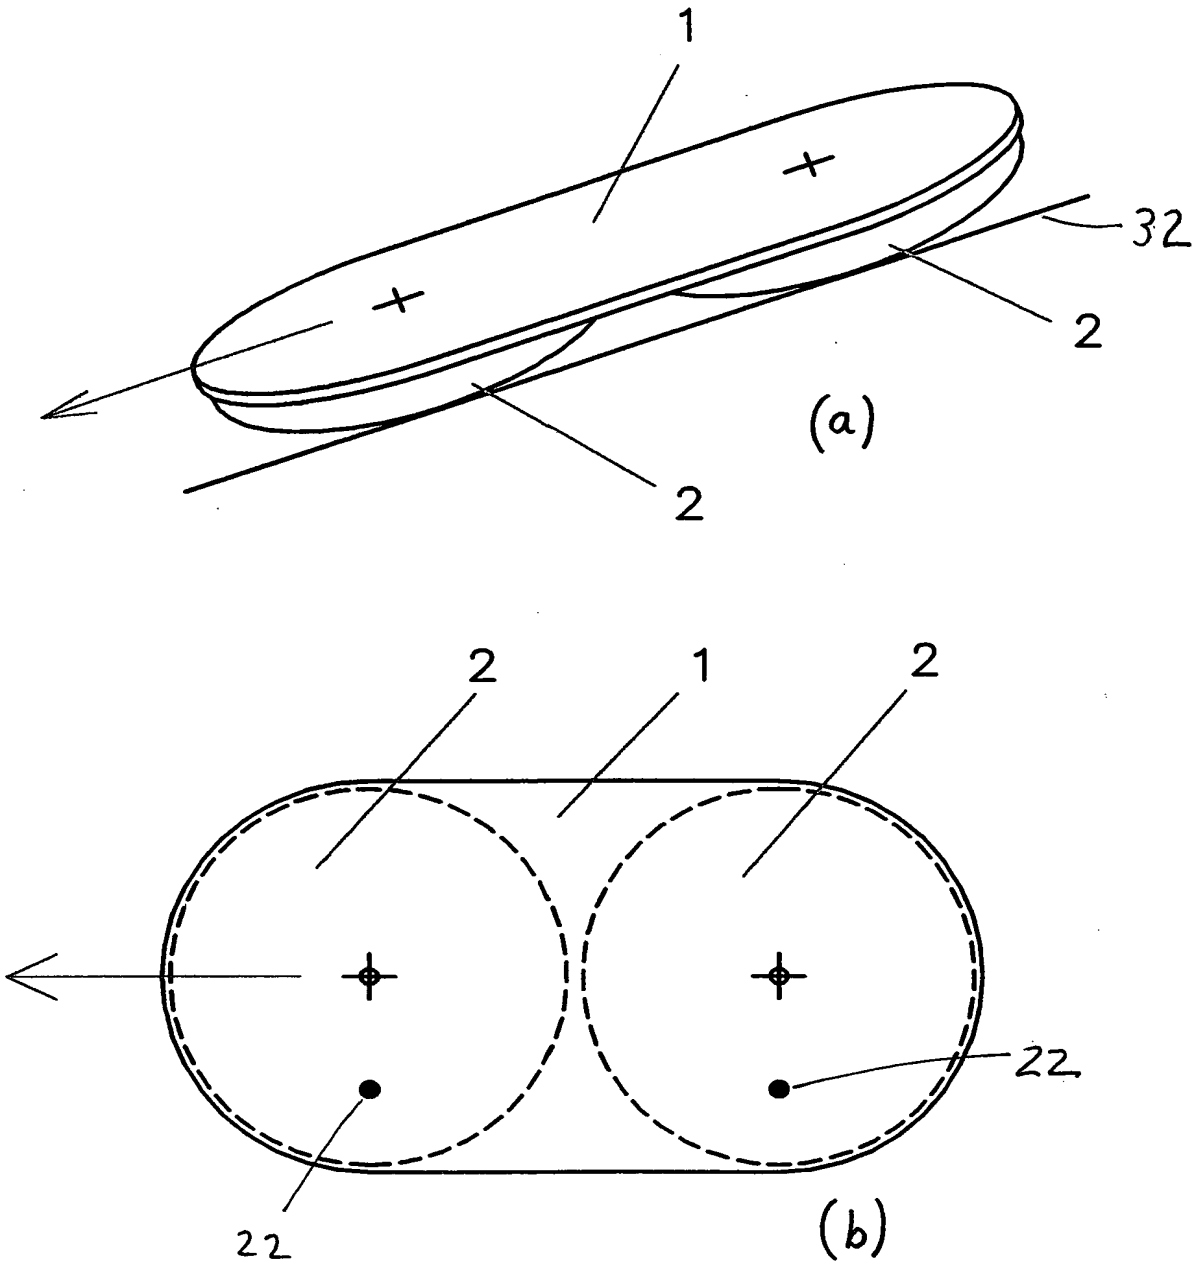

FIG.4

REPLACED

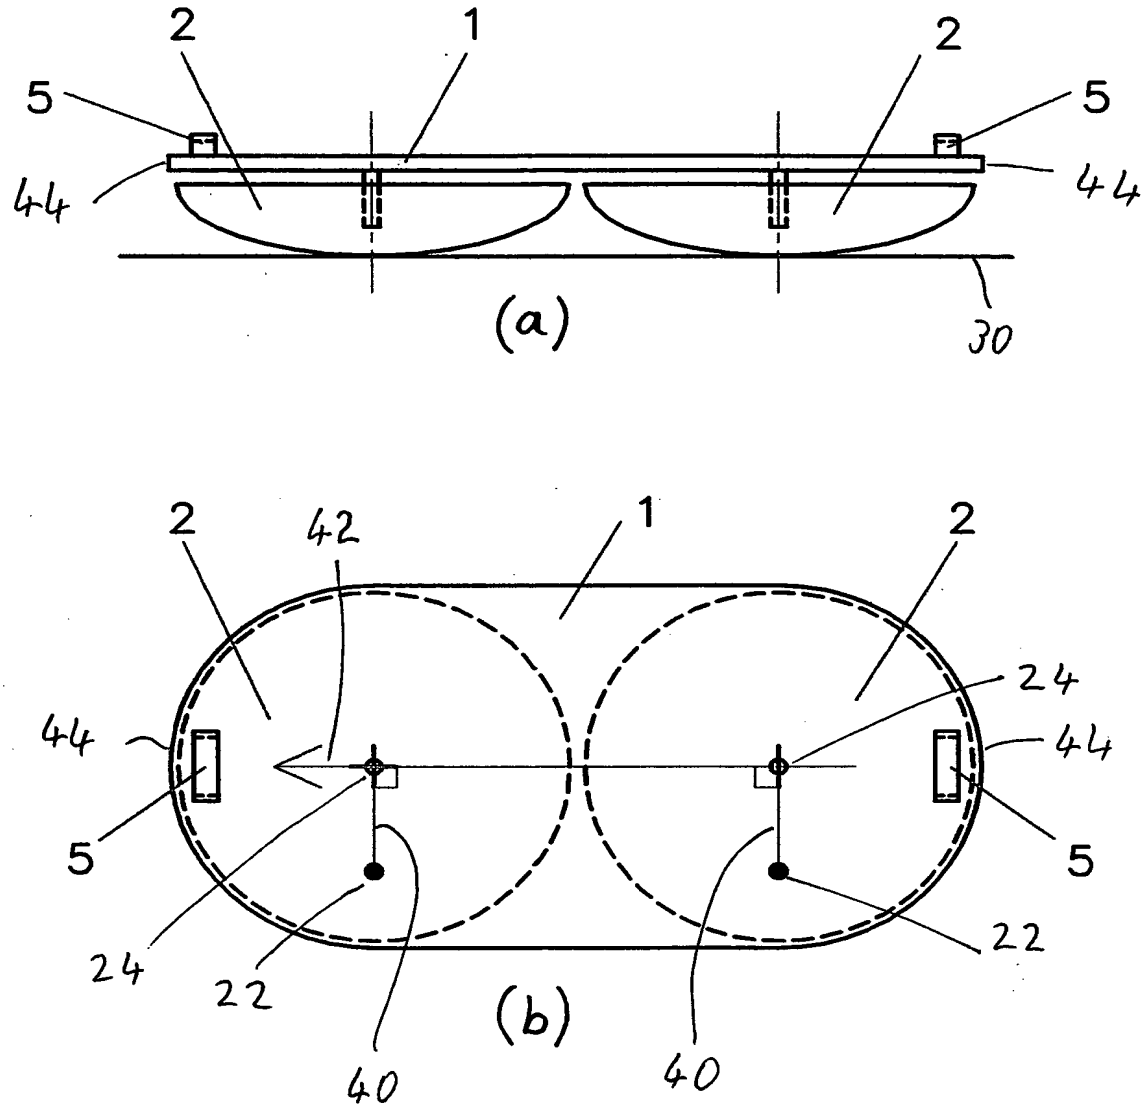

FIG.5

REPLACED

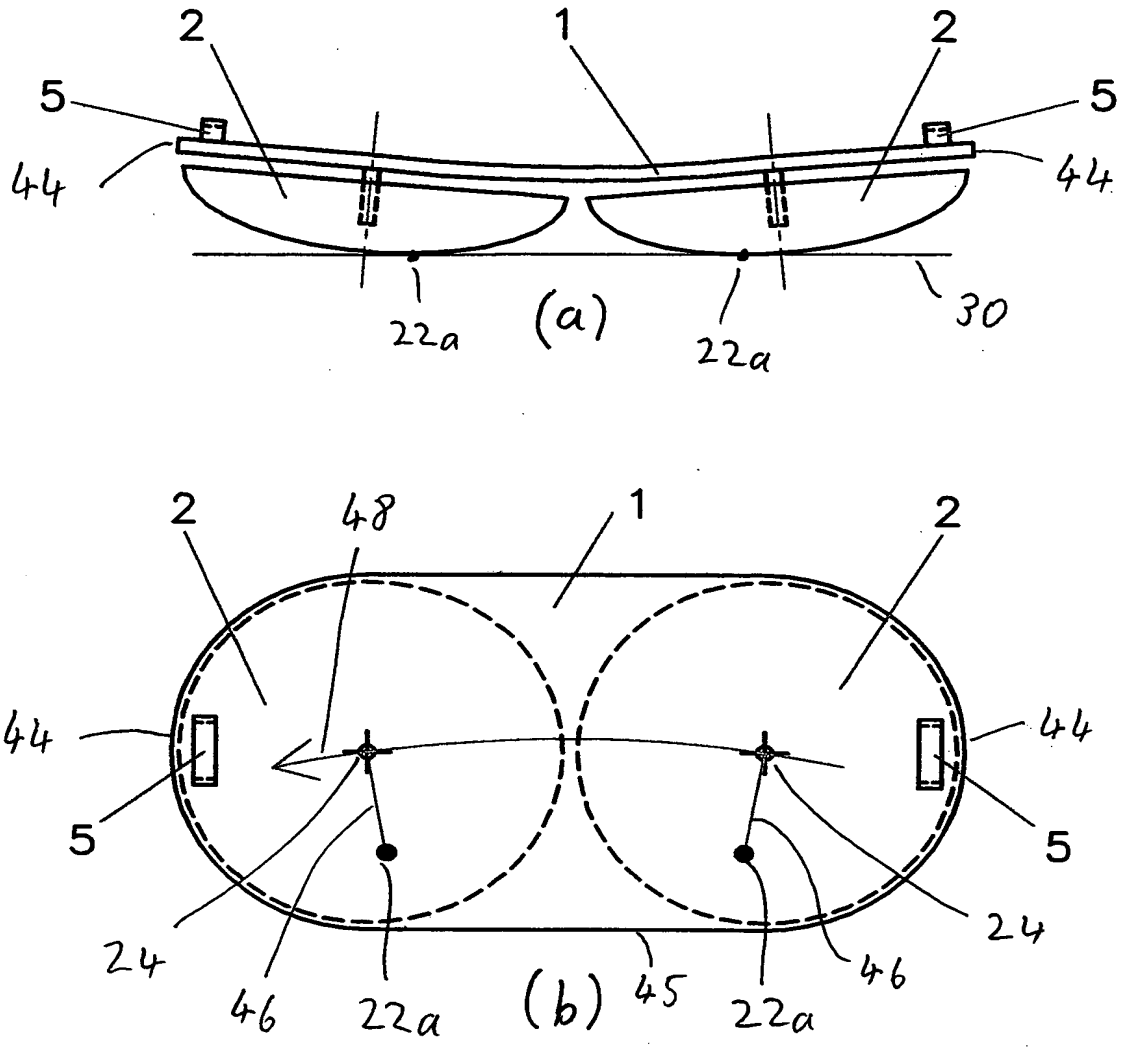

FIG.6

REPLACED

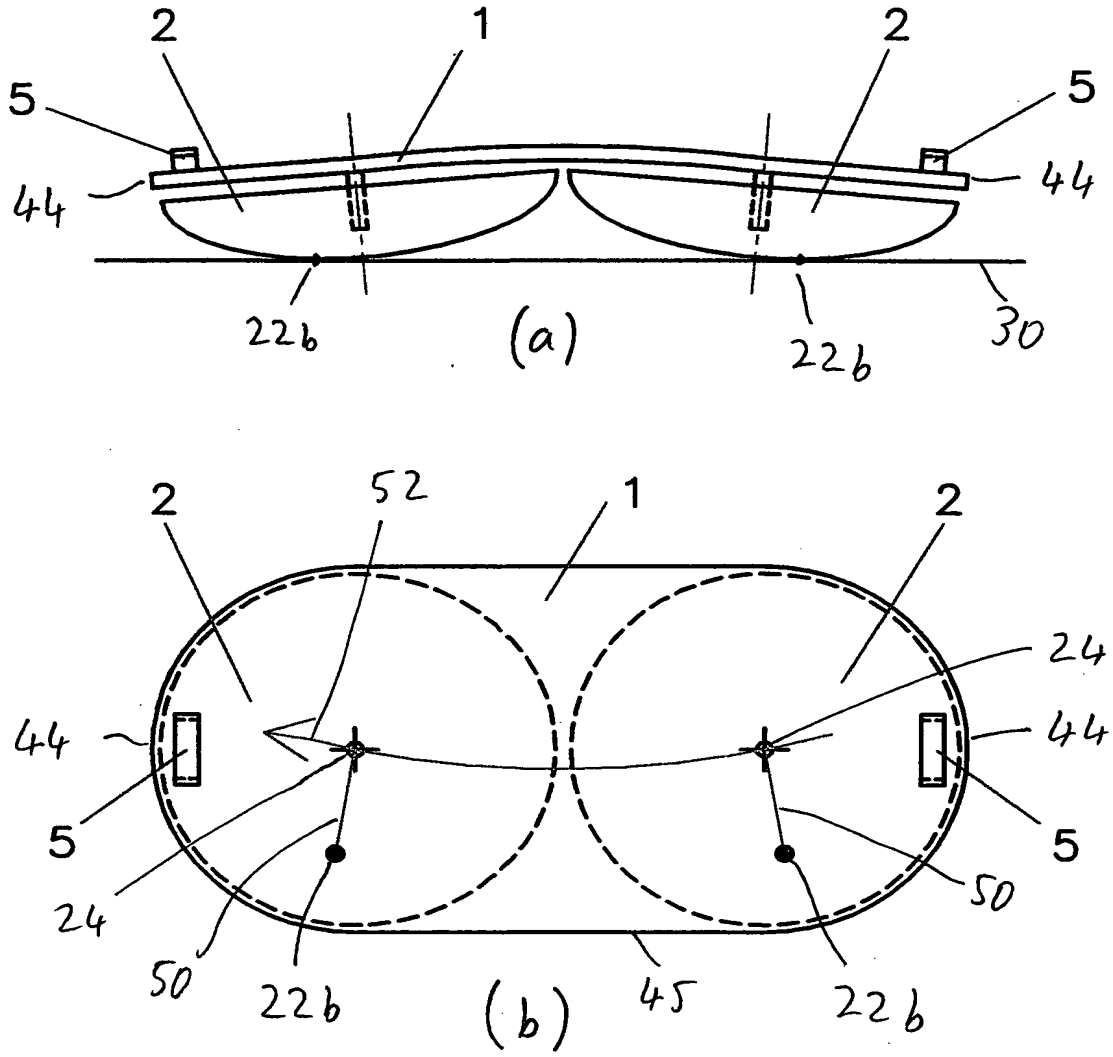

FIG.7

REPLACED

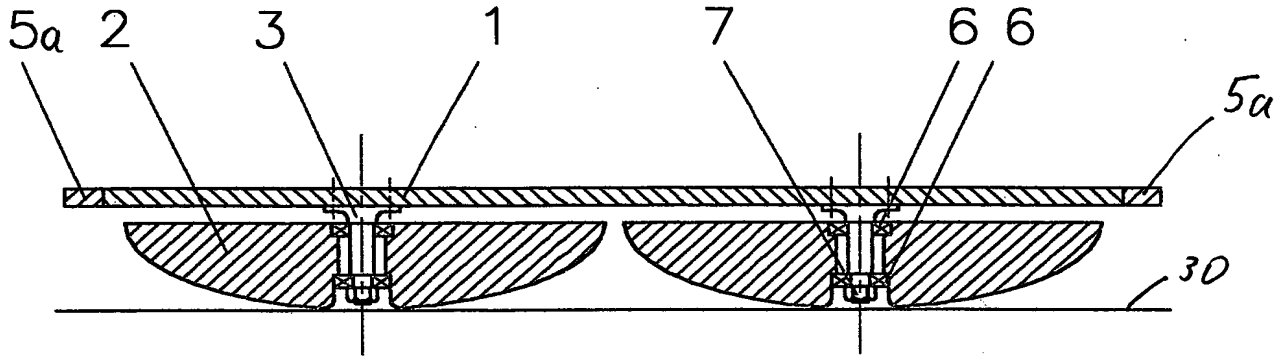

FIG.8a

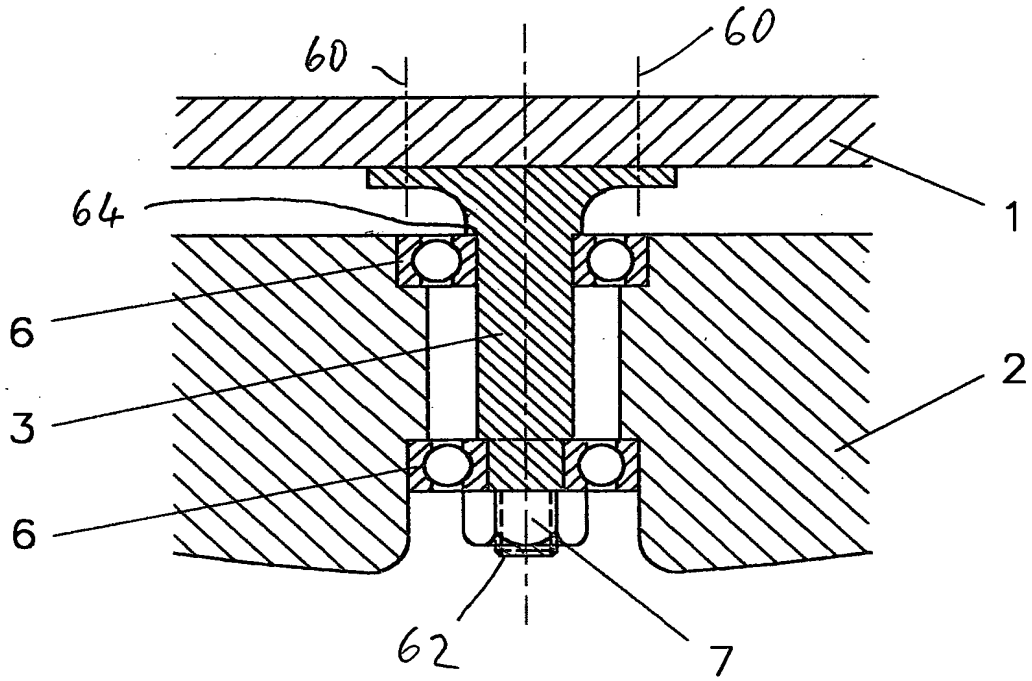

FIG.8b

REPLACED

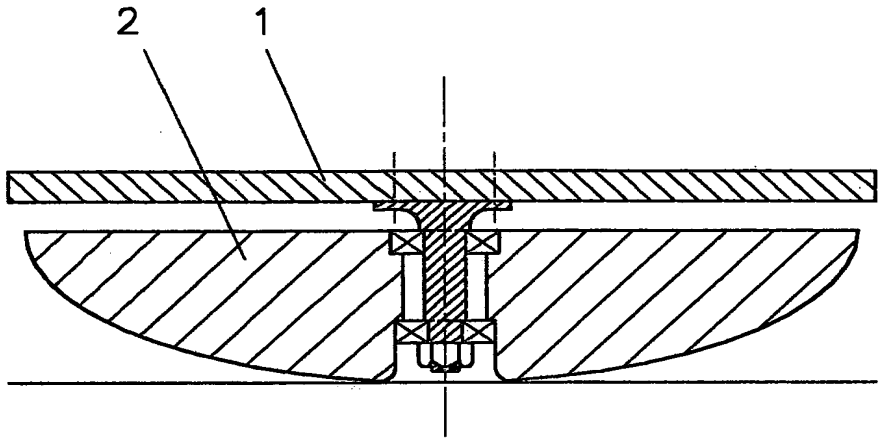

FIG.9

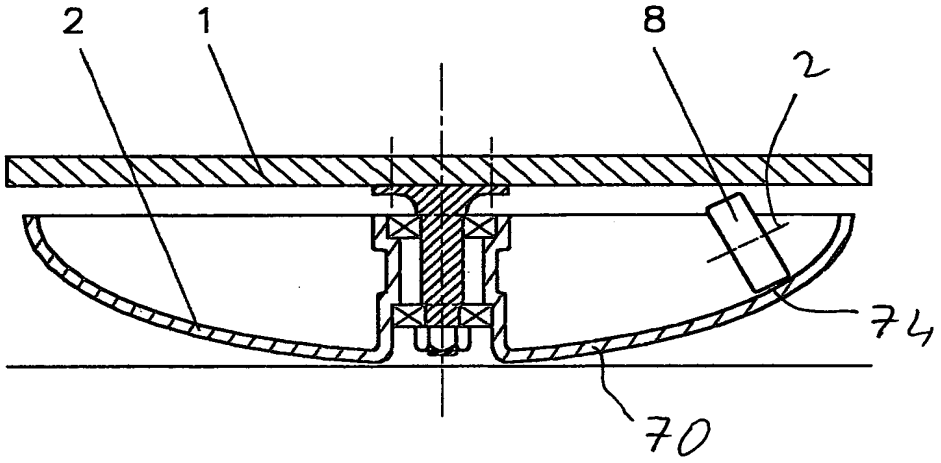

FIG.10

REPLACED

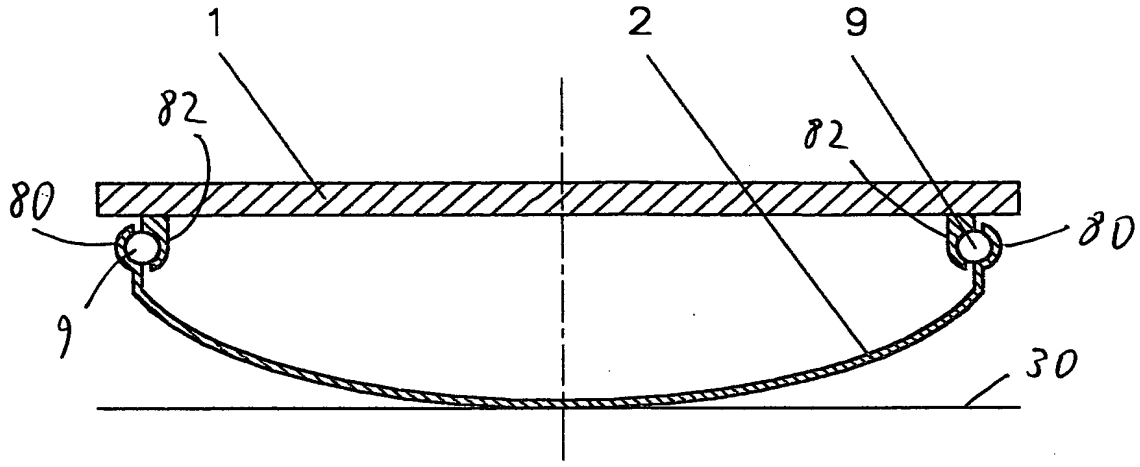

FIG.11

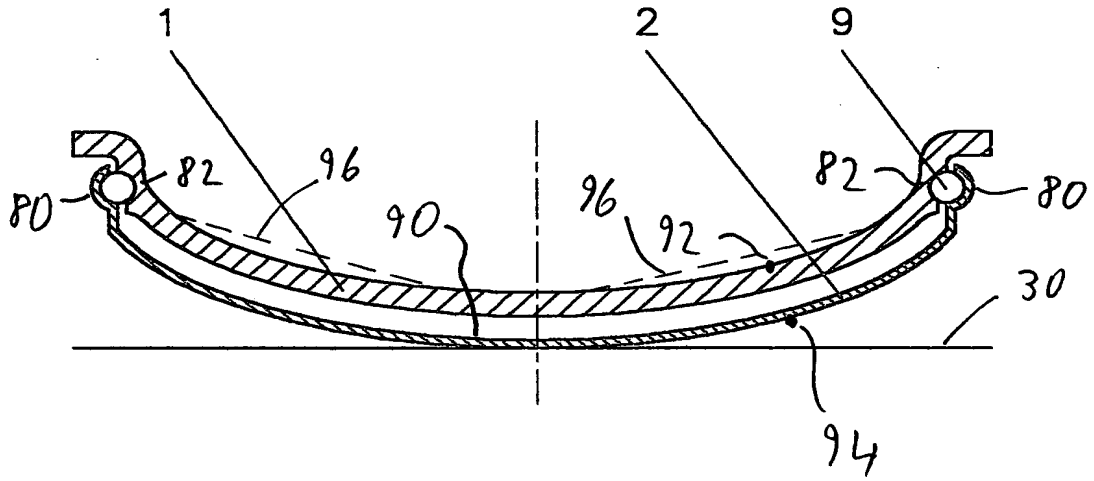

FIG.12

REPLACED

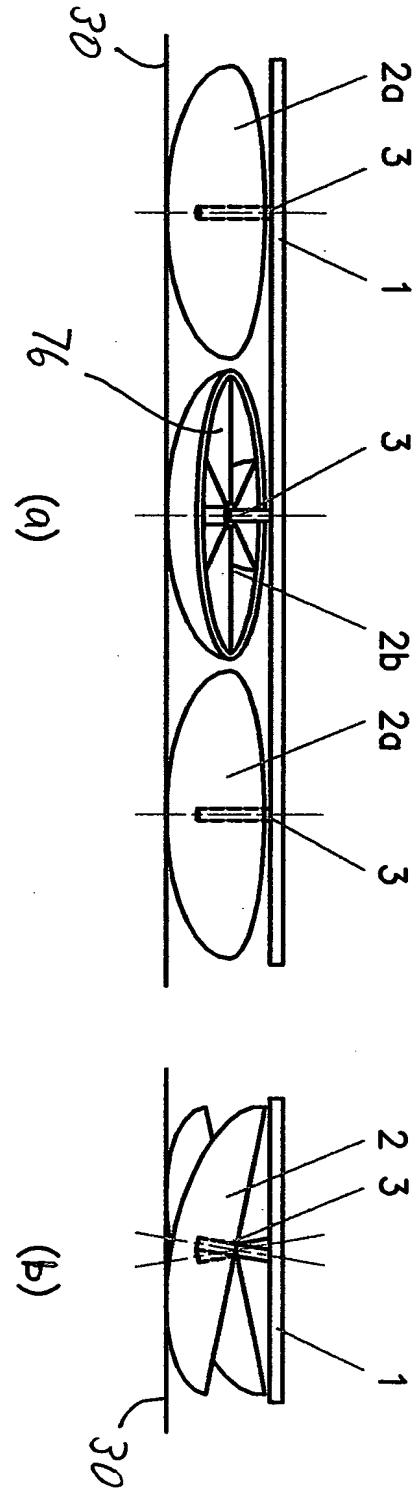

FIG.13

REPLACED

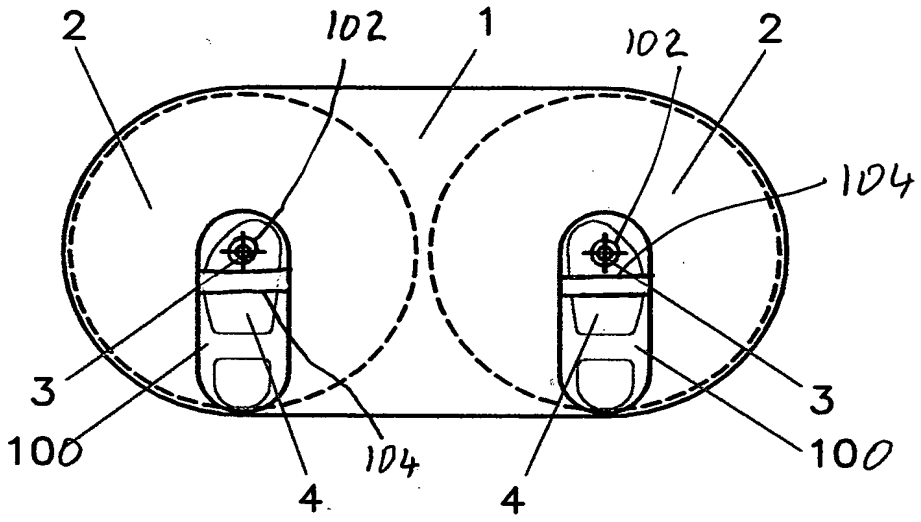

FIG.14

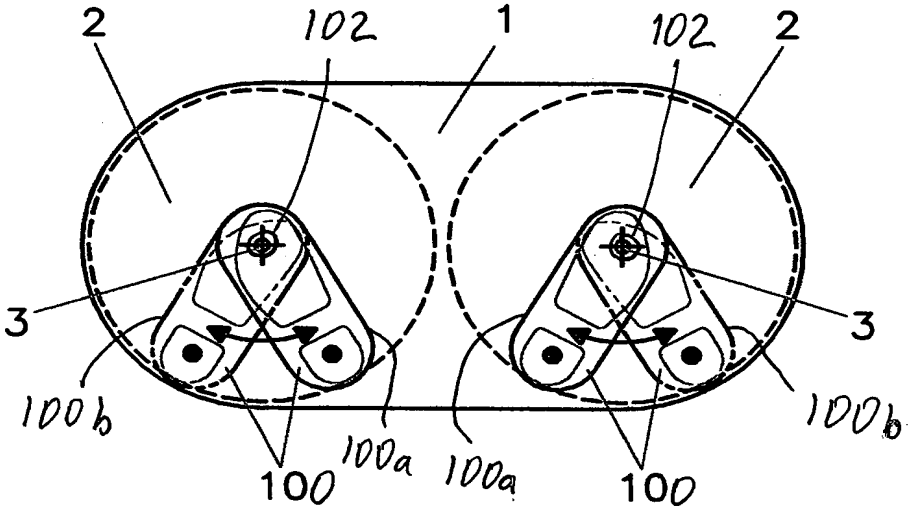

FIG.15

REPLACED